



Gymnasium Equipment Specifications

RS 116 Adjustable Frame for Basketball Backstops

SUPPLY & INSTALL:


RS 116 Adjustable frame as supplied by Royal Stewart Ltd.

Fixed frame structure shall be 2" (51 mm) x 2" (51 mm) sq. tubing with mounting pattern of 35" (889 mm) x 20" (508 mm).

Moveable frame structure shall be 1 ½" x 1 ½" sq. tubing and shall adjust the goal height from 96" (2439 mm) to 120" (3048 mm).

1" Threaded rod c/w thrust bearing and collar will move frame to travel maximum of 24" (610 mm). HD U hook to be welded to rod to accept an auger type handle.

Frame shall be painted flat black.

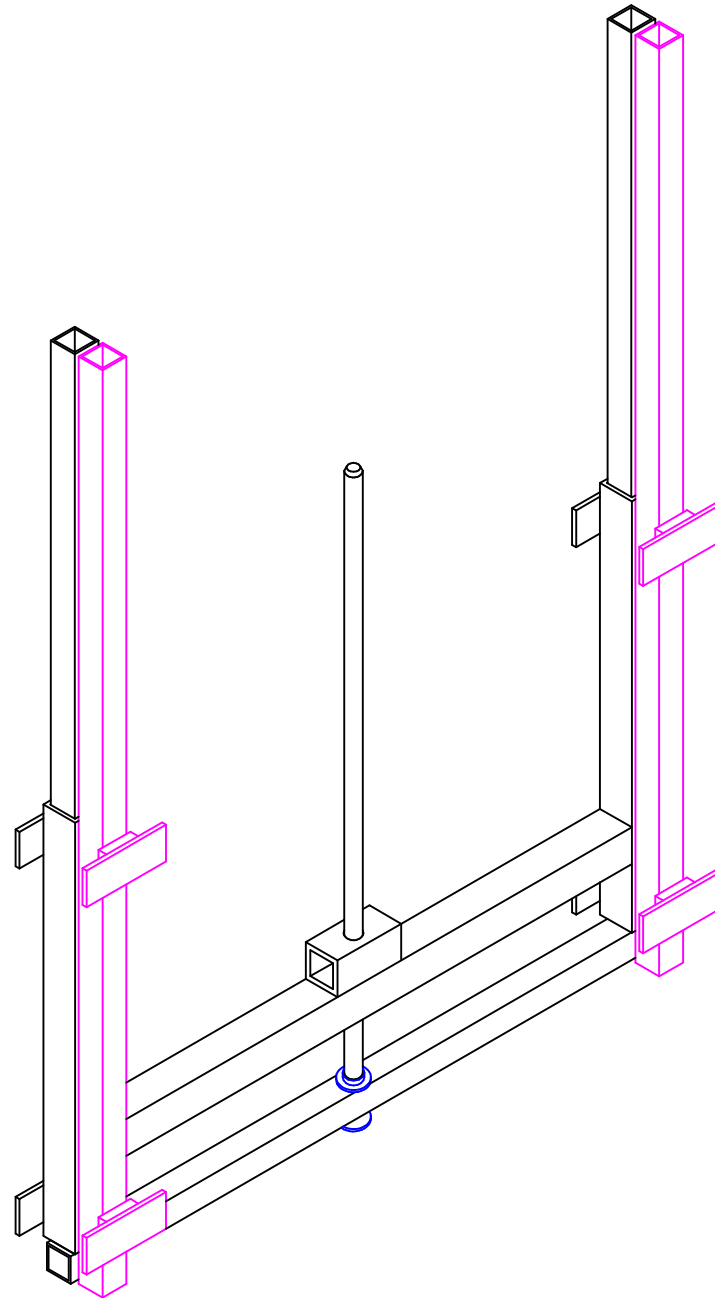

WORK ORDER / TRACKING NO		QTY REQUIRED		ROYAL STEWART LTD. Your Sports Facility and Auditorium Specialists 240 I-XL Cres. (St. Clements Ind. Park) Lockport, Manitoba, Canada, R1A 3R8		1
MATERIAL		TITLE RS-116 ADJUSTABLE FRAME				1
SCALE		N.T.S.		DWG SHEET NO		ROUTING
DRAWN BY SG		DATE 03/01/98		DWG NO		REV A

A	02/11/08	DRAWING RELEASE	ET
REV	DATE	REVISIONS DESCRIPTION	BY CHK'D
DO NOT SCALE DWG, UOS DIMENSIONS ARE IMPERIAL INCHES			